


## Needle roller bearing NAF659530-IKO - NAF659530-IKO

<https://www.123bearing.ca/bearing-housing/needle-roller-bearing/needle/naf659530-iko>

**IKO**  
**NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE**  
With Inner Ring

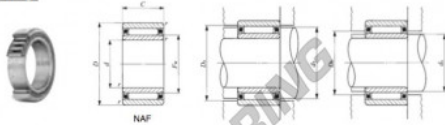

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm					Standard mounting dimensions mm				
			$d$	$D$	$C$	$r_s$ min <sup>(1)</sup>	$F_w$	$d_b$	$D_s$ Max.	$d_a$ Min.	$D_b$ Max.	
65	<b>NAF 659530</b>	790	65	95	30	1.5	75	82	87	73	73.5	76
Basic dynamic load rating $C$	Basic static load rating $C_0$	Allowable rotational speed <sup>(2)</sup>	Assembled roller ring									
N	N	rpm	LRT 657530									
63 100	144 000	6 500										

Notes:  
(1) Minimum allowable value of chamfer dimension  $r$   
(2) Allowable rotational speed applies to grease lubrication.  
Remark:  
1. The outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952384832
Inside diameter	65 mm
Outside diameter	95 mm
Thickness	30 mm
Weight	790 g
Packaging	1

[contact@123bearing.ca](mailto:contact@123bearing.ca)

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE