


GE Rod end SBB60-2RS-IKO - SBB60-2RS-IKO

<https://www.123bearing.ca/bearing-housing/rod-end/ge/sbb60-2rs-iko>

IKO
SPHERICAL BUSHINGS
Steel-on-steel Spherical Bushings Inch Series

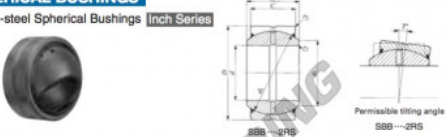

| Shaft dia. mm (inch) | Identification number | | Mass (Ref.) kg | Boundary dimensions mm(inch) | | | |
|---------------------------------|-----------------------------|--|--|---|---------------------|---------------------|---------------|
| | Without seal | With seals | | d | D | B | C |
| 95.250 (3 7/8) | | SBB 60-2RS | 6.87 | 95.250 (3 7/8) | 149.225 (5 7/8) | 83.34 (3.281) | 71.42 (2.812) |
| Radial internal clearance mm | Mounting dimensions mm | | Dynamic load capacity C _d N | Static load capacity C _s N | | | |
| | d _k Min./Max. | d ₁ r ₁ max. r ₂ max. | | C _d N | C _s N | C _s N | |
| 137 (5.394) | 0.13 / 0.23 | 108.4 | 0.6 | 0.8 | 960 000 | 5 760 000 | |

Notes: (1) Minimum allowable value of chamfer dimensions r₁ and r₂.
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_k.
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2. Not provided with prepacked grease. Perform proper lubrication for use.

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | IKO |
| N° Ean13 | 3663952392998 |
| Inside diameter | 95.25 mm |
| Outside diameter | 149.225 mm |
| Thickness | 83.34 mm |
| Type | GE |
| Lubrication | without |
| Packaging | 1 |

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE