


Cam follower CF5-R-IKO - CF5-R-IKO

<https://www.123bearing.ca/bearing-housing/deep-groove-bearing/cam-follower/cf5-r-iko>



CAM FOLLOWERS

Standard Type Cam Followers With Cage/With Screwdriver Slot

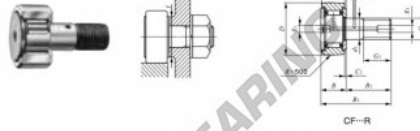

Stud dia. mm	Identification number				Mass (Ref.)				
	Shield type		Sealed type		g	D	C	d ₁	G
	With crowned outer ring	With cylindrical outer ring	With tapered outer ring	With cylindrical outer ring					
5	CF	5	R		10.3	13	9	5	M 5×0.8

Boundary dimensions mm													
G ₁	B	B ₁	B ₂	B ₃	C ₁	g ₁	g ₂	r _{max} ^(*)	f _{min} mm	Maximum ignoring stress C	Ball dynamic load rating C ₀	Ball static load rating C ₀	Maximum allowable static load
7.5	10	23	13	—	0.5	*3.1	—	0.3	9.3	1.6	2 520	2 140	1 260

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952440910
Inside diameter	5 mm
Outside diameter	13 mm
Thickness	9 mm
Packaging	1

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE