


Cam follower CF24-R-IKO - CF24-R-IKO

<https://www.123bearing.ca/bearing-housing/deep-groove-bearing/cam-follower/cf24-r-iko>

IKO

CAM FOLLOWERS

Standard Type Cam Followers With Cage/With Screwdriver Slot

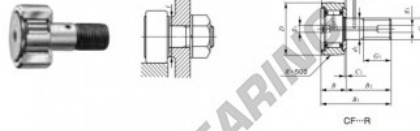

Stud dia. mm	Identification number				Maxs (Ref.)				
	Shield type		Sealed type		ϕ	D	C	d_1	G
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring					
24	CF 24	R			815	62	29	24	M24×1.5

Boundary dimensions mm													
G_1	B	B_1	B_2	B_3	C_1	ϕ_2	$\phi_{max}^{(*)}$	Mounting diameter f Min. mm	Maximum lightening torque C N·m	Ball static load rating C_0 N	Ball static load rating C_0 N	Maximum allowable static load N	
25	30.6max	80.1max	49.5	11	0.8	8	4	1	40	215	30 500	52 600	52 000

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952441481
Inside diameter	24 mm
Outside diameter	62 mm
Thickness	29 mm
Packaging	1

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE