


Cam follower CF12-VBR-IKO - CF12-VBR-IKO

<https://www.123bearing.ca/bearing-housing/deep-groove-bearing/cam-follower/cf12-vbr-iko>



CAM FOLLOWERS

Standard Type Cam Followers Full Complement Type/With Hexagon Hole

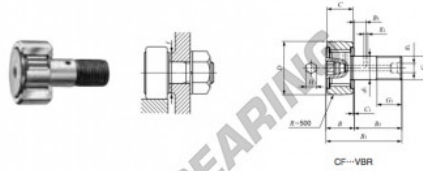

Stud dia. mm	Identification number								Mass (Ref.)				
	Shield type				Sealed type				g	D	C	d ₁	
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring					
12	CF 12-1	VBR							107	32	14	12	

Boundary dimensions mm										Mounting dimension	Maximum tightening torque	Basic dynamic load rating	Basic static load rating	Maximum allowable static load	
G	G ₁	B _{max}	B ₁ _{max}	B ₂	B ₃	C ₁	g ₁	B ₂	H	f ^(*) _{max}	f _{min}	N-m	C	C ₀	N
M12×1.5	13	15.2	40.2	25	6	0.6	6	3	6	0.6	21	21.9	13 500	19 700	13 200

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952441986
Inside diameter	12 mm
Outside diameter	30 mm
Thickness	14 mm
Packaging	1

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE