


Cam follower CFES18-UU-IKO - CFES18-UU-IKO

<https://www.123bearing.ca/bearing-housing/deep-groove-bearing/cam-follower/cfes18-uu-iko>

IKO

CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Screwdriver Slot

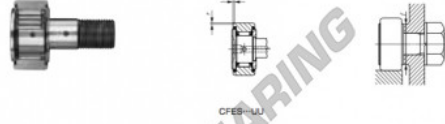

Stud dia. mm	Identification number				Mass (Ref.)			
	Shield type		Sealed type		g	D	C	d ₁
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
18				CFES 18 UU	250	40	20	18

Boundary dimensions mm										Mounting dimension f Min. mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N	
G	G ₁	B _{max}	B ₁ max	B ₂	B ₃	C ₁	B ₁	B ₂	α ₂						
M18×1.5	19	21.6	58.1	36.5	8	0.8	6	3	1	0.6	29	86.2	14 800	25 200	25 200

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060459336
Inside diameter	18 mm
Outside diameter	40 mm
Thickness	20 mm
Packaging	1

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE