


Cam follower CFE12-VBR-IKO - CFE12-VBR-IKO

<https://www.123bearing.ca/bearing-housing/deep-groove-bearing/cam-follower/cfe12-vbr-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Hexagon Hole

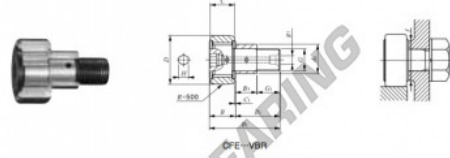

| Outside diameter of eccentric collar mm | Identification number | | | | | | Mass (Ref.) | | | |
|---|-------------------------|-----------------------------|-------------------------|-----------------------------|--|--|-------------|----|----|----------------|
| | Shield type | | | Sealed type | | | Ø | D | C | d _e |
| | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring | | | | | | |
| 16 | CFE 12 | VBR | | | | | 107 | 30 | 14 | 16 |

| Boundary dimensions mm | | | | | | | | | | |
|------------------------|----------------|------------------|-------------------|----------------|----------------|----------------|------|------------------|-----|-----|
| G | B ₃ | B _{max} | B _{1max} | B ₂ | C ₁ | G ₁ | H | H _{max} | f | g |
| M12×1.5 | 11.5 | 15.2 | 40.2 | 25 | 0.6 | 6 | 13.5 | 6 | 0.6 | 0.8 |

| Mounting dimension | Maximum splining torque | Basic dynamic load rating | Basic static load rating | Maximum allowable static load |
|--------------------|-------------------------|---------------------------|--------------------------|-------------------------------|
| f | N·m | C | C ₀ | N |
| 21 | 21.9 | 13 500 | 19 700 | 13 200 |

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | IKO |
| N° Ean13 | 3616060460455 |
| Inside diameter | 16 mm |
| Outside diameter | 30 mm |
| Thickness | 14 mm |
| Weight | 107 g |
| Packaging | 1 |

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE