


Cam follower CR12-VR-IKO - CR12-VR-IKO

<https://www.123bearing.ca/bearing-housing/deep-groove-bearing/cam-follower/cr12-vr-iko>

IKO

CAM FOLLOWERS

Inch Series Cam Followers Full Complement Type/With Screwdriver Slot

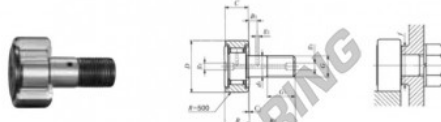

Stud dia. mm (inchi)	Identification number				Mass (Ref.) g	D	C	d ₁	G UNF	G ₁
	Shield type With cover With cylindrical outer ring	Shield type With cylindrical outer ring	Sealed type With cylindrical outer ring	Sealed type With cylindrical outer ring						
9.525 ($\frac{3}{8}$)	CR 12	VR			36	19.050 ($\frac{3}{4}$)	12.700 ($\frac{1}{2}$)	9.525 ($\frac{3}{8}$)	$\frac{1}{8}$ -24	9.525 ($\frac{3}{8}$)
Boundary dimensions mm(inch)					Mounting dimension f Min. mm(inch)	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N		
B max	B ₂	B ₃	C ₁	g ₁					g ₂	r
14.208	22.225 ($\frac{7}{8}$)	8.350 ($\frac{1}{3}$)	0.794 ($\frac{1}{8}$)	4.782 ($\frac{1}{4}$)	2.381 ($\frac{1}{8}$)	0.794 ($\frac{1}{8}$)	13.484 ($\frac{1}{2}$)	10.8	8 710	12 300

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060463395
Inside diameter	9.525 mm
Outside diameter	19.05 mm
Thickness	12.7 mm
Weight	36 g
Packaging	1

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE