


## Drawn cup roller bearing TAM3515-IKO - TAM3515-IKO

<https://www.123bearing.ca/bearing-housing/needle-roller-bearing/drawn-cup/tam3515-iko>

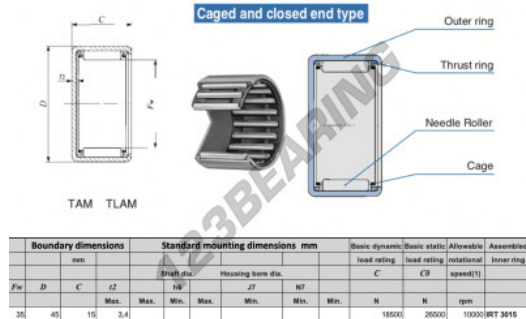

Boundary dimensions			Standard mounting dimensions mm						Basic dynamic load rating		Basic static load rating		Allowable rotational speed (1)	Assembled inner ring
mm			Bore dia.		Housing bore dia.				C	CB	rpm			
Pw	D	C	IT	IT	IT	IT	IT	IT	N	N	rpm			
35	45	15	Max.	Min.	Max.	Min.	Max.	Min.	18500	26000	10000		RT 3615	

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060599544
Inside diameter	35 mm
Outside diameter	45 mm
Thickness	15 mm
Limiting speed	10000 rpm
Dynamic load	18.5 kN
Static load	26.5 kN
Packaging	1

[contact@123bearing.ca](mailto:contact@123bearing.ca)

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE