


Drawn cup roller bearing BHA1610-Z-IKO - BHA1610-Z-IKO

<https://www.123bearing.ca/bearing-housing/needle-roller-bearing/drawn-cup/bha1610-z-iko>

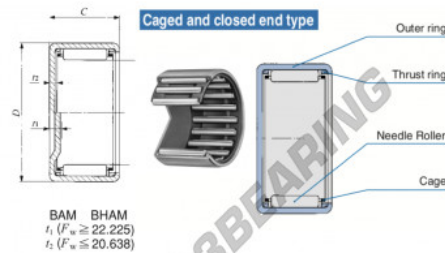

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable axial displacement	
F_w	D	C	r	H_0	H_1	H_2	C	CF	C_0	C_{0r}	relative	inner ring
			Max.	Max.	Min.	Max.	Min.	N	N	N	mm	mm
15.882 (1)	33.338 (1.313)	15.881 (0.625)	3.4						15300	22100	15000	-

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060600400
Inside diameter	25.4 mm
Outside diameter	33.338 mm
Thickness	15.88 mm
Limiting speed	15000 rpm
Dynamic load	15.3 kN
Static load	22.1 kN
Packaging	1

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE