


Drawn cup roller bearing BA3016-Z-IKO - BA3016-Z-IKO

<https://www.123bearing.ca/bearing-housing/needle-roller-bearing/drawn-cup/ba3016-z-iko>

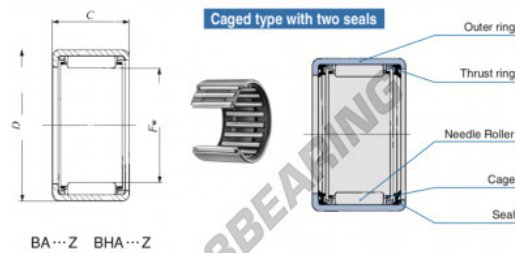

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(I)	Assembled inner ring
F_w	D	C	c_2	h_6	J_7	C	C_0			
			Min.	Max.	Min.	Max.	N	N	rpm	
47.625 (1.8 9/16)	57.15 (2.2 5/8)	25.4 (1.000)	2.8				35400	70600	7000—	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601568
Inside diameter	47.625 mm
Outside diameter	57.15 mm
Thickness	25.4 mm
Limiting speed	7000 rpm
Dynamic load	35.4 kN
Static load	70.6 kN
Packaging	1

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE