


## Drawn cup roller bearing BA3416-Z-IKO - BA3416-Z-IKO

<https://www.123bearing.ca/bearing-housing/needle-roller-bearing/drawn-cup/ba3416-z-iko>

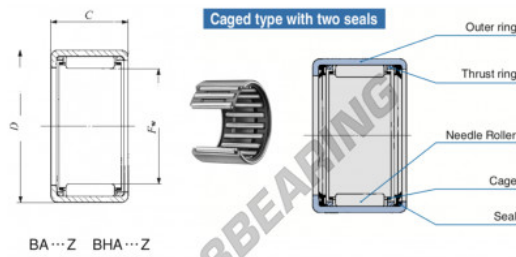

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring
$F_w$	$D$	$C$	$d$	Housing bore dia.		$C$	$C_0$	rpm		
			Max.	Min.	Min.	Max.	N	N	1000	
53.975 (2.12)	63.500 (2.5)	25.40 (1.000)	2.0	53.975	53.996	63.516	63.488	38700	62500	5500 (RB 3618)

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601629
Inside diameter	53.975 mm
Outside diameter	63.5 mm
Thickness	25.4 mm
Limiting speed	5500 rpm
Dynamic load	38.7 kN
Static load	82.5 kN
Packaging	1

[contact@123bearing.ca](mailto:contact@123bearing.ca)

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE