


Drawn cup roller bearing BA85-Z-IKO - BA85-Z-IKO

<https://www.123bearing.ca/bearing-housing/needle-roller-bearing/drawn-cup/ba85-z-iko>

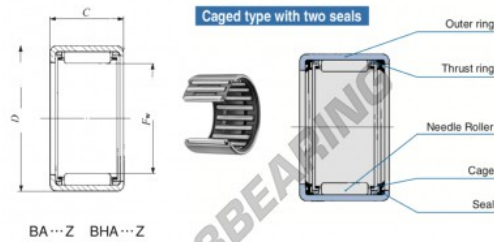

| Boundary dimensions mm(inch) | | | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable rotational speed | Assembled inner ring | |
|------------------------------|----------------|--------------|---------------------------------|--------|--------|--------|---------------------------|--------------------------|----------------------------|----------------------|----|
| F_w | D | C | d^2 | | JT | C | C_0 | rpm | | | |
| | | | Max. | Min. | Max. | Min. | N | N | open | | |
| 12.708 (1/2) | 17.462 (11/16) | 7.921 (3/12) | 1 | 11.112 | 11.101 | 17.472 | 17.654 | 2400 | 2510 | 30000 | -- |

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | IKO |
| N° Ean13 | 3616060603043 |
| Inside diameter | 12.7 mm |
| Outside diameter | 17.462 mm |
| Thickness | 7.92 mm |
| Limiting speed | 30000 rpm |
| Dynamic load | 2.49 kN |
| Static load | 2.51 kN |
| Packaging | 1 |

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE