


## Drawn cup roller bearing BA86-Z-IKO - BA86-Z-IKO

<https://www.123bearing.ca/bearing-housing/needle-roller-bearing/drawn-cup/ba86-z-iko>

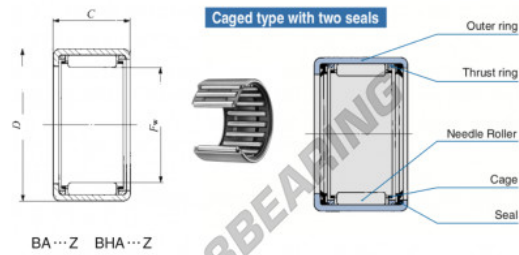

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring
<i>P<sub>10</sub></i>	<i>D</i>	<i>C</i>	<i>d</i>		<i>H</i>		<i>C</i>	<i>C<sub>0</sub></i>		
			Min.	Max.	Min.	Max.	mm	mm	rpm	
13,708 (0.21)	17,462 (0.68)	9,520 (375)	11,112	11,501	17,472	17,454	3470	3850	30000	

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603067
Inside diameter	12.7 mm
Outside diameter	17.462 mm
Thickness	9.52 mm
Limiting speed	30000 rpm
Weight	5 g
Dynamic load	3.47 kN
Static load	3.85 kN
Packaging	1

[contact@123bearing.ca](mailto:contact@123bearing.ca)

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE