


## Drawn cup roller bearing BA88-Z-IKO - BA88-Z-IKO

<https://www.123bearing.ca/bearing-housing/needle-roller-bearing/drawn-cup/ba88-z-iko>

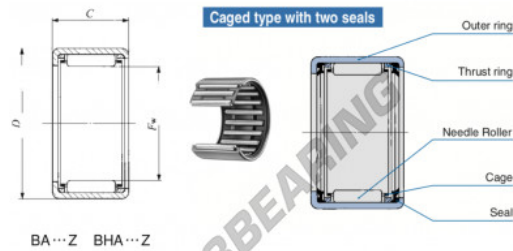

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r)	Assembled inner ring	
For	D	C	d <sub>2</sub>	d <sub>1</sub>	Housing bore dia. d <sub>2</sub>	C	C/D			
	Max.	Max.	Min.	Max.	Min.	N	N	rpm	RB 58	
12.700 (1/2)	17.462 (0.686)	12.750 (500)	1	12.700	12.689	17.472	17.454	4710	5700	30000

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603081
Inside diameter	12.7 mm
Outside diameter	17.462 mm
Thickness	12.7 mm
Limiting speed	30000 rpm
Dynamic load	4.71 kN
Static load	5.7 kN
Packaging	1

[contact@123bearing.ca](mailto:contact@123bearing.ca)

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE