


Drawn cup roller bearing BA1216-Z-IKO - BA1216-Z-IKO

<https://www.123bearing.ca/bearing-housing/needle-roller-bearing/drawn-cup/ba1216-z-iko>

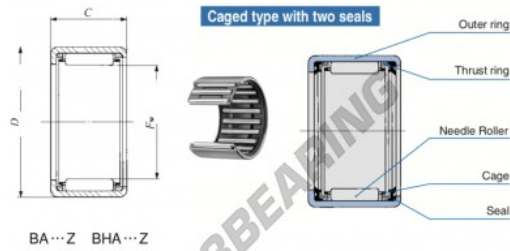

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring	
Fw	D	C	Shaft dia. G7		Housing bore dia. H7		C	C/D	rpm	
			Max.	Min.	Max.	Min.				N
19,950 (0.7854)	25,400 (1.0)	21,430 (843.3)	19,050	19,037	25,412	25,391	16300	26500	20000	IRB B16-1

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603203
Inside diameter	19.05 mm
Outside diameter	25.4 mm
Thickness	25 mm
Limiting speed	20000 rpm
Dynamic load	16 kN
Static load	26 kN
Packaging	1

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE