


## Tapered roller bearing 45320-JTEKT - 45320-JTEKT

<https://www.123bearing.ca/bearing-housing/roller-bearing/tapered/45320-jtekt>

Double-row tapered roller bearings  
TDI type Koyo

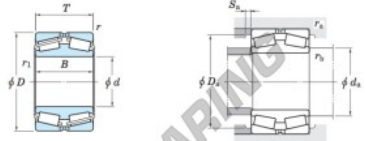

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>r</i> <sub>1</sub> max.	<i>C</i> <sub>r</sub>	<i>C</i> <sub>0r</sub>	Grease lub.	Oil lub.
100	165	52	52	2	2.5	237	384	1 800	2 300

Bearing No.	Mounting dimensions (mm)						Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)
	<i>d</i> <sub>a</sub> max.	<i>D</i> <sub>a</sub> max.	<i>D</i> <sub>a</sub> min.	<i>S</i> <sub>a</sub> min.	<i>r</i> <sub>a</sub> max.	<i>r</i> <sub>b</sub> max.		<i>Y</i> <sub>2</sub>	<i>Y</i> <sub>3</sub>	<i>Y</i> <sub>0</sub>	
45320	119	155	148	3.9	2	2	0.35	1.96	2.90	1.91	4.26

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250260599
Inside diameter	100 mm
Outside diameter	165 mm
Thickness	52 mm
Weight	4260 g
Packaging	1

[contact@123bearing.ca](mailto:contact@123bearing.ca)

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE