


Roller bearing NCF2916CV-SKF - NCF2916CV-SKF

<https://www.123bearing.ca/bearing-housing/roller-bearing/roller/ncf2916cv-skf>

Dimensions d'encombrement			Charges de base		Vitesses de base		Designation
d	D	B	dynamique C	statique C ₀	Vitesse de référence	Vitesse limite	
mm			kN		tr/min		
80	110	19	80,9	132	2600	3400	NCF 2916 CV

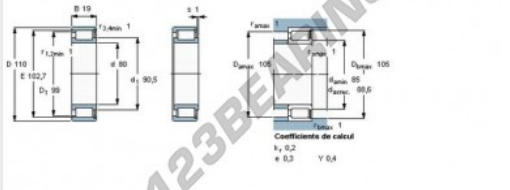

Technical drawing showing dimensions and coefficients for the NCF2916CV roller bearing. The drawing includes a side view and a cross-section view. Dimensions shown include: D = 110 mm, d = 80 mm, B = 19 mm, r₁ max = 1 mm, r₂ max = 1 mm, E = 102,7 mm, D₁ = 98 mm, d₁ = 80,5 mm, D₂ max = 105 mm, D₃ max = 105 mm, D₄ max = 98 mm, D₅ max = 80,5 mm, r₃ max = 1 mm, r₄ max = 1 mm. Coefficients of calculation: k₁ = 0,2, k₂ = 0,3, Y_{0,4}.

PRODUCT FEATURES

Brand	SKF
N° Ean13	7316572315606
Inside diameter	80 mm
Outside diameter	110 mm
Thickness	19 mm
Limiting speed	3400 rpm
Weight	550 g
Dynamic load	80.9 kN
Static load	132 kN
Packaging	1
Standard	No standard

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE