


Cam follower CF10-VRM-IKO - CF10-VRM-IKO

<https://www.123bearing.ca/bearing-housing/deep-groove-bearing/cam-follower/cf10-vrm-iko>



CAM FOLLOWERS

Standard Type Cam Followers Full Complement Type/With Screwdriver Slot

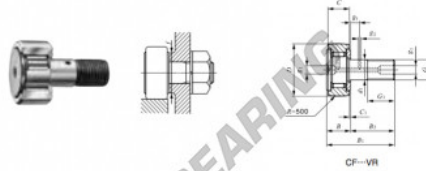

Stud dia. mm	Identification number								Mass (Ref.)					
	Shield type				Sealed type				g	D	C	d ₁		
	With crowned outer ring		With cylindrical outer ring		With crowned outer ring		With cylindrical outer ring							
10	CF 10	VRM							46	22	12	10		
Boundary dimensions mm														
G	G ₁	B _{max}	B _{1 max}	B ₂	B ₃	C ₁	g ₁	g ₂	f ⁽¹⁾ mm	Mounting diameter f _{min} mm	Maximum tightening torque C N·m	Ball static load rating C ₀ N	Maximum allowable static load N	
M10×1	12	13.2	36.2	23	—	0.6	*4	—	0.3	16	14.7	9 570	14 500	8 650

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952440248
Inside diameter	10 mm
Outside diameter	22 mm
Thickness	12 mm
Packaging	1

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE