


Tapered roller bearing 46T30312JR-59-JTEKT - 46T30312JR-59-JTEKT

<https://www.123bearing.ca/bearing-housing/roller-bearing/tapered/46t30312jr-59-jtekt>

Double-row tapered roller bearings ——— **Koyo**
TDO type

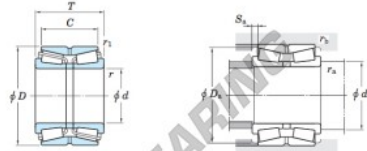

| Boundary dimensions (mm) | | | | | | Basic load ratings (kN) | | Limiting speeds (min ⁻¹) | |
|--------------------------|-----|----|----|-----|----------------|-------------------------|-----------------|--------------------------------------|----------|
| d | D | T | C | r | r ₁ | C _r | C _{0r} | Grease lub. | Oil lub. |
| 60 | 130 | 74 | 69 | 2.5 | 1 | 297 | 401 | 2 500 | 3 300 |

| Bearing No. | Mounting dimensions (mm) | | | | | Constant e | Axial load factors | | | Refer.) Mass (kg) |
|---------------|--------------------------|---------------------|---------------------|---------------------|---------------------|------------|--------------------|----------------|----------------|-------------------|
| | d ₄ min. | D ₄ min. | S ₄ min. | r ₄ max. | r ₅ max. | | Y ₂ | Y ₃ | Y ₀ | |
| 46T30312JR/59 | 74 | 120 | 7.5 | 2.5 | 1 | 0.35 | 1.96 | 2.91 | 1.91 | 4.46 |

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | JTEKT |
| N° Ean13 | 3663952437613 |
| Inside diameter | 60 mm |
| Inside diameter | 2.362" inch |
| Outside diameter | 130 mm |
| Outside diameter | 5.118" inch |
| Thickness | 74 mm |
| Thickness | 2.913" inch |
| Packaging | 1 |

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE