


Cam follower CFES10-1-BR-IKO - CFES10-1-BR-IKO

<https://www.123bearing.ca/bearing-housing/deep-groove-bearing/cam-follower/cfes10-1-br-iko>



CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Hexagon Hole

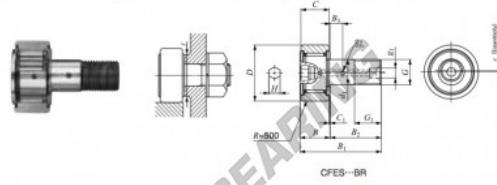

Stud dia. mm	Identification number								Mass (Ref.)						
	Shield type				Sealed type				g	D	C	d _i			
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring							
10	CFES 10-1 BR								60	26	12	10			
Boundary dimensions mm															
G	G ₁	B	B ₁	B ₂	B ₃	C ₁	g ₁	g ₂	H	ε	Mounting dimension f Min. mm	Maximum operating torque N·m	Basic dynamic load rating C	Basic static load rating C ₀	Maximum allowable static load N
M10×1.25	12	13.2	36.2	23	—	0.6	—	4	0.3	0.3	16	13.8	5 430	6 890	6 890

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952443485
Inside diameter	10 mm
Outside diameter	26 mm
Thickness	12 mm
Packaging	1

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE