


## Axial needle roller AZK15283.5-IKO - AZK15283.5-IKO

<https://www.123bearing.ca/bearing-housing/needle-roller-bearing/axial-needle/azk15283.5-iko>

**IKO**

**THRUST BEARINGS**

Thrust Roller Bearings

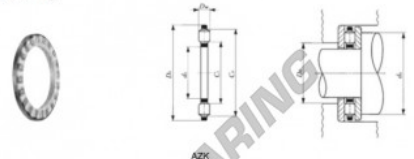

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
15	<b>AZ 15289</b>	28	<b>AZK 15283.5</b>	9.4	<b>WS 1528</b>	<b>GS 1528</b>	9.3	

Boundary dimensions mm										Standard mounting dimensions mm	Basic dynamic load rating C	Basic static load rating C <sub>0</sub>	Allowable rotational speed <sup>(2)</sup>	
d	D	T	d <sub>c</sub>	D <sub>c</sub>	D <sub>w</sub>	B	r <sub>s</sub> (1)	C <sub>1</sub>	C <sub>2</sub>	d <sub>s</sub> Min.	D <sub>s</sub> Max.	N	N	rpm
15	28	9	15.04	27.8	3.5	2.75	0.3	17	25	25	18	10 200	23 900	14 000

Notes: (1) Minimum allowable value of chamfer dimension r  
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952486833
Inside diameter	15 mm
Outside diameter	28 mm
Thickness	3.5 mm
Weight	9.4 g
Packaging	1

[contact@123bearing.ca](mailto:contact@123bearing.ca)

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE