


Axial needle roller AZK12017518-IKO - AZK12017518-IKO

<https://www.123bearing.ca/bearing-housing/needle-roller-bearing/axial-needle/azk12017518-iko>

IKO

THRUST BEARINGS

Thrust Roller Bearings

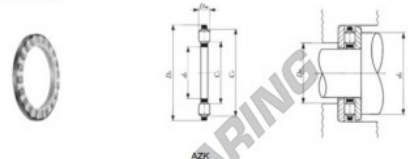

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
120	AZ 12017542	4 020	AZK 12017518	1 640	WS 120175	GS 120175		1 190

Boundary dimensions mm										Standard mounting dimensions mm	Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾	
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₀	d _s Min.	D _s Max.	N	N	rpm
120	175	42	120.1	174.5	18	12	1.1	132	168	167	133	313 000	1 160 000	2 000

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060466228
Inside diameter	120 mm
Outside diameter	175 mm
Thickness	18 mm
Weight	1640 g
Packaging	1

contact@123bearing.ca

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE