


## Axial needle roller AZK24031524-IKO - AZK24031524-IKO

<https://www.123bearing.ca/bearing-housing/needle-roller-bearing/axial-needle/azk24031524-iko>

**IKO**  
**THRUST BEARINGS**

Thrust Roller Bearings

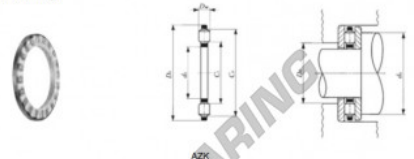

Shaft dia. mm	Identification number						
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
240	AZ 24031554	13 200	AZK 24031524	5 520	WS 240315	GS 240315	3 840

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C <sub>0</sub>	Allowable rotational speed <sup>(2)</sup>
d	D	T	d <sub>c</sub>	D <sub>c</sub>	D <sub>w</sub>	B	r <sub>s</sub> <sup>(1)</sup>	C <sub>1</sub>	C <sub>2</sub>	d <sub>s</sub> Min.	D <sub>s</sub> Max.	N	N	rpm
240	315	54	240.15	314	24	15	2	256	304	302	257	695 000	3 250 000	1 100

Notes: <sup>(1)</sup> Minimum allowable value of chamfer dimension r  
<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952487953
Inside diameter	240 mm
Outside diameter	315 mm
Thickness	24 mm
Weight	5520 g
Packaging	1

[contact@123bearing.ca](mailto:contact@123bearing.ca)

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE