


## Tapered roller bearing 45392-JTEKT - 45392-JTEKT

<https://www.123bearing.ca/bearing-housing/roller-bearing/tapered/45392-jtekt>

Double-row tapered roller bearings  
TDI type Koyo

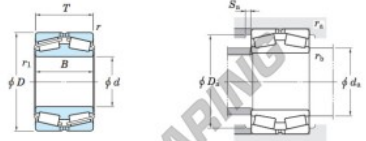

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>r</i> min.	<i>C<sub>r</sub></i>	<i>C<sub>0r</sub></i>	Grease lub.	Oil lub.
460	760	240	240	7.5	7.5	5 230	10 400	250	330

Bearing No.	Mounting dimensions (mm)						Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)
	<i>d<sub>a</sub></i> max.	<i>D<sub>a</sub></i> max.	<i>D<sub>a</sub></i> min.	<i>S<sub>a</sub></i> min.	<i>r<sub>a</sub></i> max.	<i>r<sub>b</sub></i> max.		<i>Y<sub>2</sub></i>	<i>Y<sub>3</sub></i>	<i>Y<sub>0</sub></i>	
45392	532	724	677	7	6	6	0.39	1.74	2.59	1.70	444

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952482194
Inside diameter	460 mm
Outside diameter	760 mm
Thickness	240 mm
Weight	444000 g
Packaging	1

[contact@123bearing.ca](mailto:contact@123bearing.ca)

+1(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE